



**MULTIPURPOSE DOORS**  
CLEAN ROOM, LEAD LINE, ACOUSTIC,  
SHAFT, AND AUTO SWING DOORS  
FLIP-FLOP DOORS **NEW**

We are Hörmann, a pioneer in high-performance doors across the world and No. 1 door brand in Europe. Established in 1935, we adopt cutting-edge German technology to design, build, and supply doors for Industrial, Commercial, and Residential applications.

We started our journey in India as Shakti Met-Dor (Now Shakti Hörmann) in 1994 and have been operating as a Hörmann subsidiary since 2012. We have developed a reputation for excellence in the Indian market with high-quality products, prompt delivery, and a service paradigm that has become an industry benchmark.

We have a pan-India presence with sales and marketing offices spread across all major metros, and our manufacturing facility near Hyderabad is equipped to produce over 200,000 hollow metal doors & frames and over 10,000 Industrial doors per annum. All our doors come with varied options in ironmongery, sizes, and finishes; incorporating the latest global standards in Safety and Security.

Our vision is to introduce products and services that enrich customer experiences across sectors, built on the foundations of innovation, quality, and customer fulfilment.

Our presence in the global economy's key regions makes us a strong, future-oriented partner for industrial and public construction projects.



### In-house Product Development

Growing and constantly changing functional and safety requirements necessitate continuous new construction/equipment developments and improvements, especially when it comes to moveable construction components such as doors. In this area, our qualified development teams time and again prove their specialised expertise.



### Highly Sophisticated Production Methods

We at Hörmann rely on the latest production technology at our specialised factories. Computer-controlled operations ensure dimensionally accurate elements with perfectly fitted fittings and functional parts.



### Fire Testing at Accredited Labs

Our new and further developments are constantly tested for fire resistance through fire tests at CBRI - India, Warrington - UK, and Underwriters Laboratories (UL) - Chicago. We continually test and certify with glazing and fire-rated steel frame profiles as per IS3614 Part 2 & BS476 Part 22 Standards. The knowledge gained from these ensures high fire protection for life and property.



### Expert Building Support

Experienced specialists within our customer-oriented sales organisation accompany you from the planning stage through technical clarification and door hardware scheduling to ensure proper selection and application. Expert fitting is guaranteed by experienced Hörmann fitters and engineers.



**40 Countries**  
Worldwide




**6000+**  
Strong Workforce



**20 Million+**  
Doors Delivered



**100+**  
Sales Subsidiaries



**38 Factories**  
across Europe, Asia,  
and North America



Manufacturing Facility in  
Hyderabad

**Material**

Galvanised Steel  
Stainless Steel

**Sheet Thickness**

Frame - 1.2 mm  
Shutter - 0.8 mm

**Optional Sheet Thickness**

Frame - 1.6 / 2.0 mm  
Shutter - 1.2 / 1.6 mm

**Frame Size**

Standard - 125 x 55 mm  
Optional - Architrave

**Shutter Thickness** - 46 mm

**Infill**



Honeycomb



Mineral Wool



R



LB

**Vision Panel**



200 x 300 mm  
150 x 750 mm  
450 x 750 mm

**Louvre**

450 x 300 mm  
450 x 200 mm

**Applications**

- Commercial Buildings
- Institutions
- Public Buildings
- Airports/Metro
- Hospitals

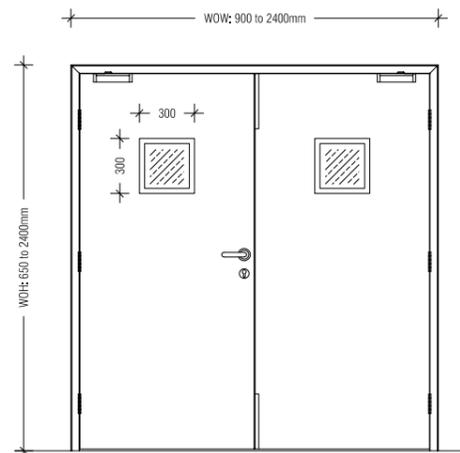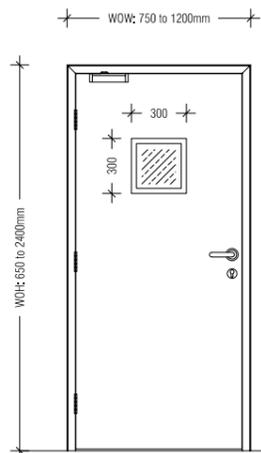

\*max door height is upto 3000mm

WOW = Wall Opening Width  
WOH = Wall Opening Height

**Material**

Galvanised Steel  
Stainless Steel

**Sheet Thickness**

Frame - 1.2 mm  
Shutter - 0.8 mm

**Optional Sheet Thickness**

Frame - 1.6 / 2.0 mm  
Shutter - 1.2 / 1.6 mm

**Frame Size**

Standard - 125 x 55 mm  
Optional - Architrave

**Shutter Thickness** - 46 mm

**Infill**



Honeycomb



Mineral Wool





G

**Vision Panel**

450 x 750 mm

**Applications**

- Pharma Units
- Food Processing
- Testing Centres and Labs

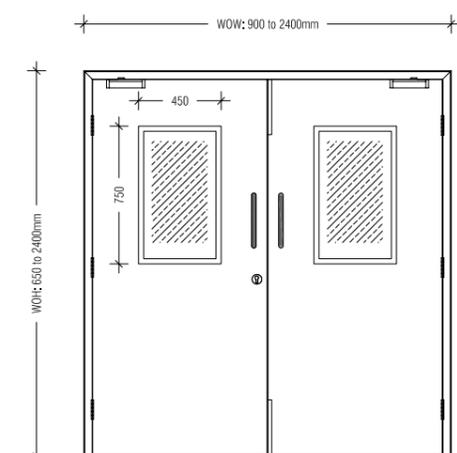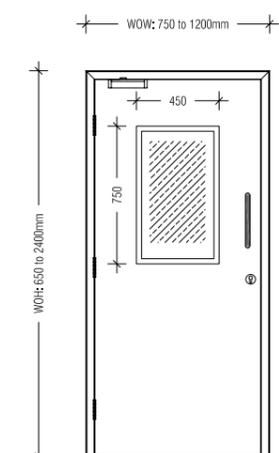

\*max door height is upto 3000mm

WOW = Wall Opening Width  
WOH = Wall Opening Height



**Material**

Galvanised Steel  
Stainless Steel

**Sheet Thickness**

Frame - 1.2 mm  
Shutter - 0.8 mm

**Optional Sheet Thickness**

Frame - 1.6 / 2.0 mm  
Shutter - 1.2 / 1.6 mm

**Frame Size**

Standard - 125 x 55 mm  
Optional - Architrave

**Shutter Thickness** - 46 mm

**Infill**



Honeycomb



Mineral Wool





V

**Vision Panel**

300 x 300 mm  
150 x 750 mm  
450 x 750 mm

**Applications**

- Hospitals
- Corridors
- Ward Rooms
- Consultancy
- Patient Rooms
- Utilities

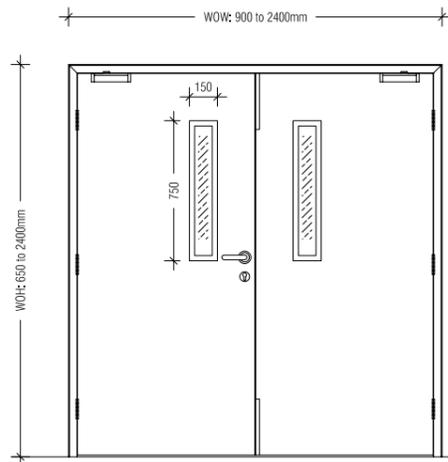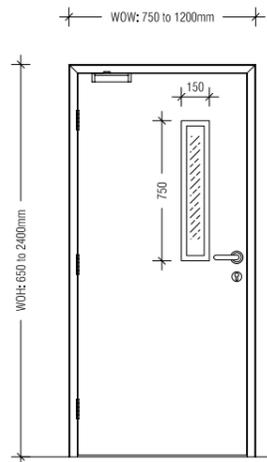

\*max door height is upto 3000mm

WOW = Wall Opening Width  
WOH = Wall Opening Height



**Material**

Galvanised Steel  
Stainless Steel

**Sheet Thickness**

Frame - 1.6 mm  
Shutter - 1.2 mm

**Frame Size**

Standard - 125 x 55 mm

**Lead Line**

Frame - 1.6 mm  
Shutter - 1.6 mm  
Optional - 2 mm

**Shutter Thickness** - 48 mm

**Infill**



Honeycomb



R



**Vision Panel (Optional)**

200 x 300 mm

**Applications**

- X-Rays Rooms
- CT Scan
- MRI

**Tested as per**  
**DAE - AERB Standards**

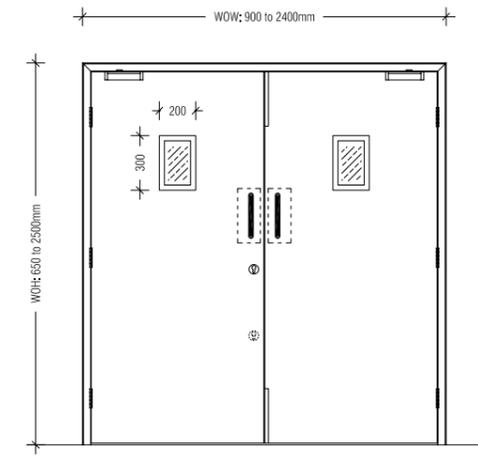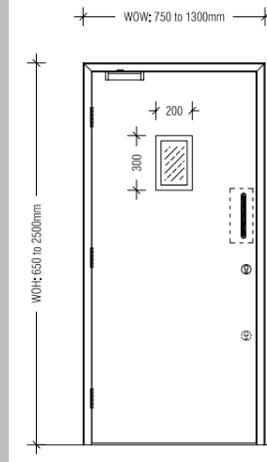

WOW = Wall Opening Width  
WOH = Wall Opening Height

**Material**  
Galvanised Steel  
Stainless Steel

**Sheet Thickness**  
Frame - 1.6 mm  
Shutter - 1.2 mm

**Frame Size**  
Standard - 125 x 55 mm  
Optional - Architrave

**Shutter Thickness** - 48 mm

**Infill**



Mineral Wool




- Single Door 1200 X 2400 - 35 dB - Infill HC
  - Single Door 1200 X 2400 - 40 dB - Infill MW
  - Double Door 2400 X 2400 - 35 dB - Infill HC
  - Double Door 2400 X 2400 - 39 dB - Infill MW
- \*All doors with sill and groove frame

**Vision Panel**  
200 x 300 mm  
150 x 750 mm  
450 x 750 mm

**Applications**

- Commercial Buildings
- Institutions
- Public Buildings
- Airports/Metro
- Hospitals

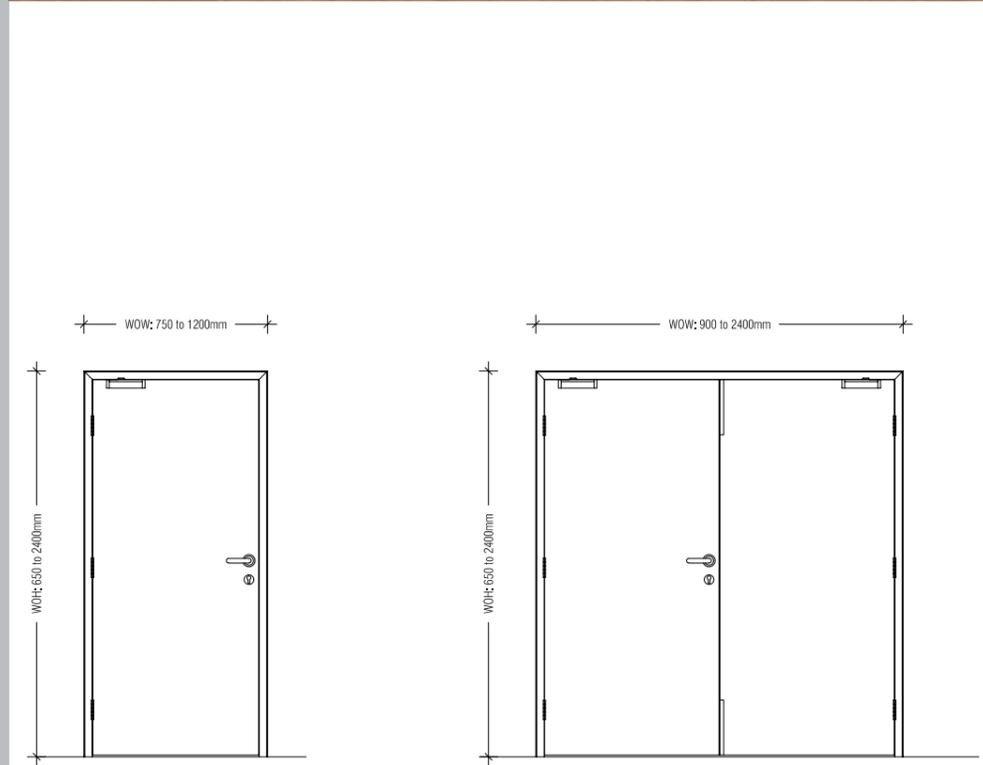

\*max door height is upto 3000mm

WOW = Wall Opening Width  
WOH = Wall Opening Height

**Material**  
Galvanised Steel  
Stainless Steel

**Sheet Thickness**  
Frame - 1.2 mm  
Shutter - 0.8 mm

**Optional Sheet Thickness**  
Frame - 1.6 / 2.0 mm  
Shutter - 1.2 / 1.6 mm

**Frame Size**  
Standard - 125 x 55 mm  
Optional - Architrave

**Shutter Thickness** - 46 mm

**Infill**



Honeycomb




LB

**Louvre**  
450 x 300 mm  
300 x 450 mm

**Applications**

- Toilet Main Entrance
- Toilet for People with Special Needs

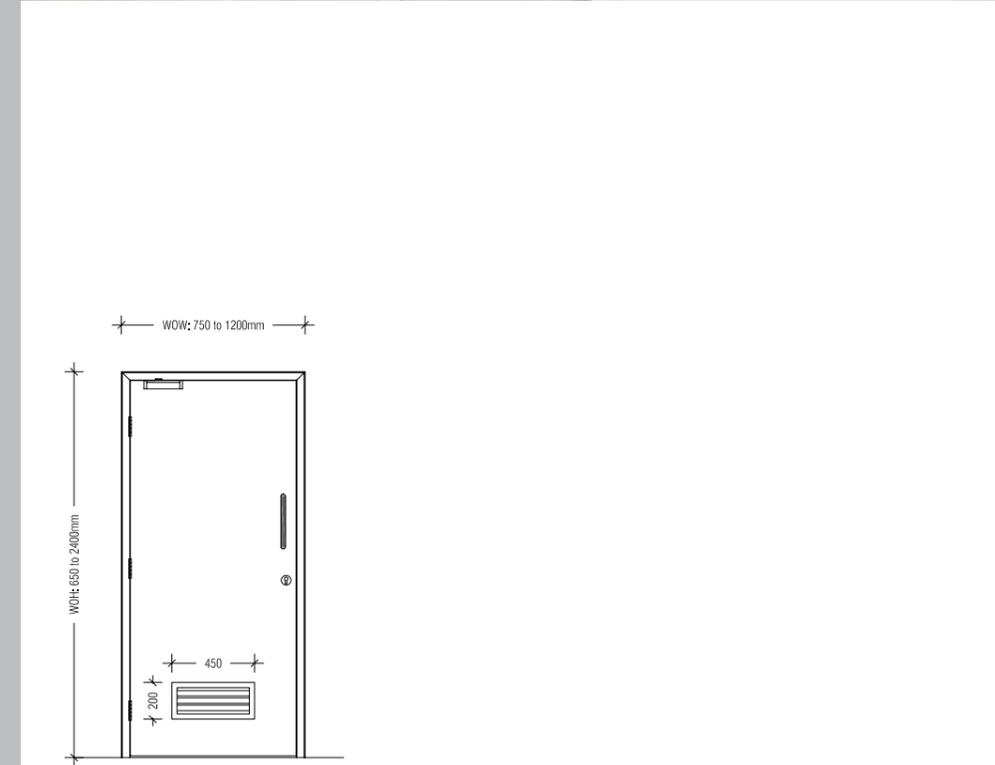

WOW = Wall Opening Width  
WOH = Wall Opening Height

**Material**  
Galvanised Steel  
Stainless Steel

**Sheet Thickness**  
Frame - 1.2 mm  
Shutter - 0.8 mm

**Optional Sheet Thickness**  
Frame - 1.6 / 2.0 mm  
Shutter - 1.2 / 1.6 mm

**Frame Size**  
Standard - 125 x 55 mm  
Optional - Architrave

**Shutter Thickness** - 46 mm


**Infill**



Honeycomb

**Applications**  
• Electrical Shaft  
• LV Shaft  
• Plumbing Shaft  
• FHC

Available with Fire Rating

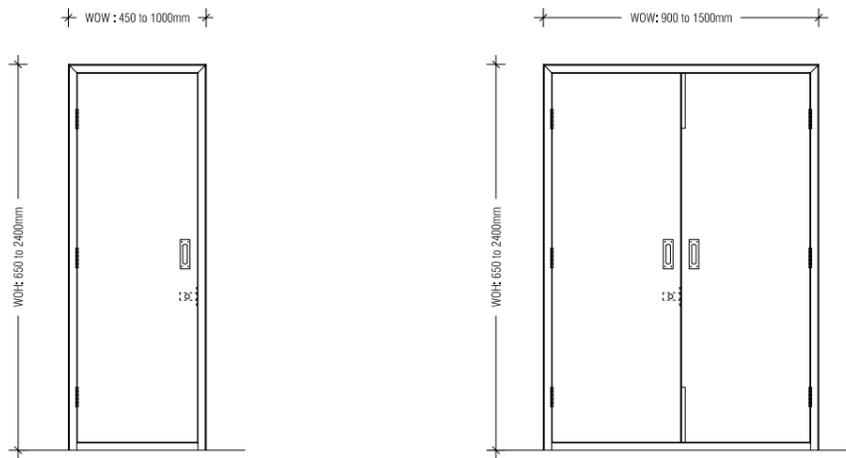

\*shaft door shown from FFL

WOW = Wall Opening Width  
WOH = Wall Opening Height

**Material**  
Galvanised Steel  
Stainless Steel

**Sheet Thickness**  
Frame - 1.6 mm  
Shutter - 1.2 mm


**Frame Size**  
Standard - 125 x 60 mm

**Shutter Thickness** - 60 mm

**Infill**  
Toughened Glass

**Glass Thickness**  
8 mm  
10 mm  
12 mm

**Applications**  
• Commercial Buildings  
• Institutions  
• Public Buildings  
• Airports/Metro  
• Hospitals

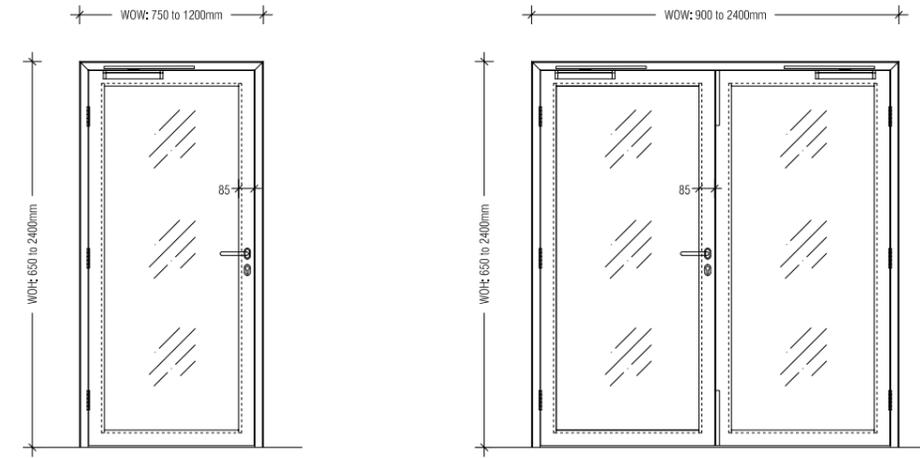

\*max door height is upto 3000mm

WOW = Wall Opening Width  
WOH = Wall Opening Height

**Material**  
Galvanised Steel  
Stainless Steel

**Sheet Thickness**  
Frame - 1.2 mm  
Shutter - 0.8 mm

**Optional Sheet Thickness**  
Frame - 1.6 / 2.0 mm  
Shutter - 1.2 / 1.6 mm

**Frame Size**  
Standard - 125 x 60 mm

**Shutter Thickness** - 46 mm

**Infill**



Honeycomb




Mineral Wool

**Vision Panel**  
200 x 300 mm  
150 x 750 mm  
450 x 750 mm

**Louvre**  
450 x 300 mm  
300 x 450 mm

- Applications**
- Commercial Buildings
  - Institutions
  - Public Buildings
  - Airports/Metro
  - Hospitals

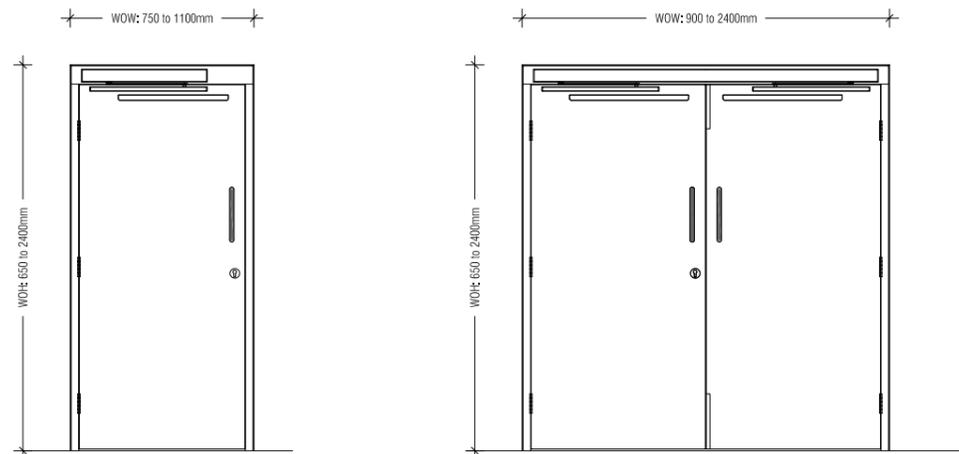

\*max door height is upto 3000mm

**Features**


- Low Energy Operator with Safety Sensors
- Available with Slide Arm and Scissor Arm
- Integrated Door Co-ordinator for Double Leaf
- Suitable for Fire Rated Applications

WOW = Wall Opening Width  
WOH = Wall Opening Height

**Material**  
Polyethylene PE500

**Shutter Thickness** - 15 mm

**Acrylic glass**  
15 mm (1/2")



**Applications**

- Food Industry (meat processing, bakeries)
- Cold Stores
- Retail and Supermarkets
- Hotels and Restaurants
- Industrial Kitchens
- Hospitals


RAL 9010	White	RAL 1018	Yellow	RAL 3000	Red
RAL 6024	Green	RAL 5010	Blue	RAL 7035	Light Grey
RAL 7037	Dusty Grey	RAL 7024	Graphite Grey		



**Features**

- Made of solid material
- Hygienic (EU/FDA approved)
- Stainless Steel Hinges
- Maintenance-free
- 10 year guarantee on door leaves
- Washable with high-pressure washer and foam cleaner
- Ideal for use at temperatures of -30°C to 60°C
- Suitable for heavy-duty continuous usage
- Robust, Durable, Stable
- Easy installation

## Door Elevation

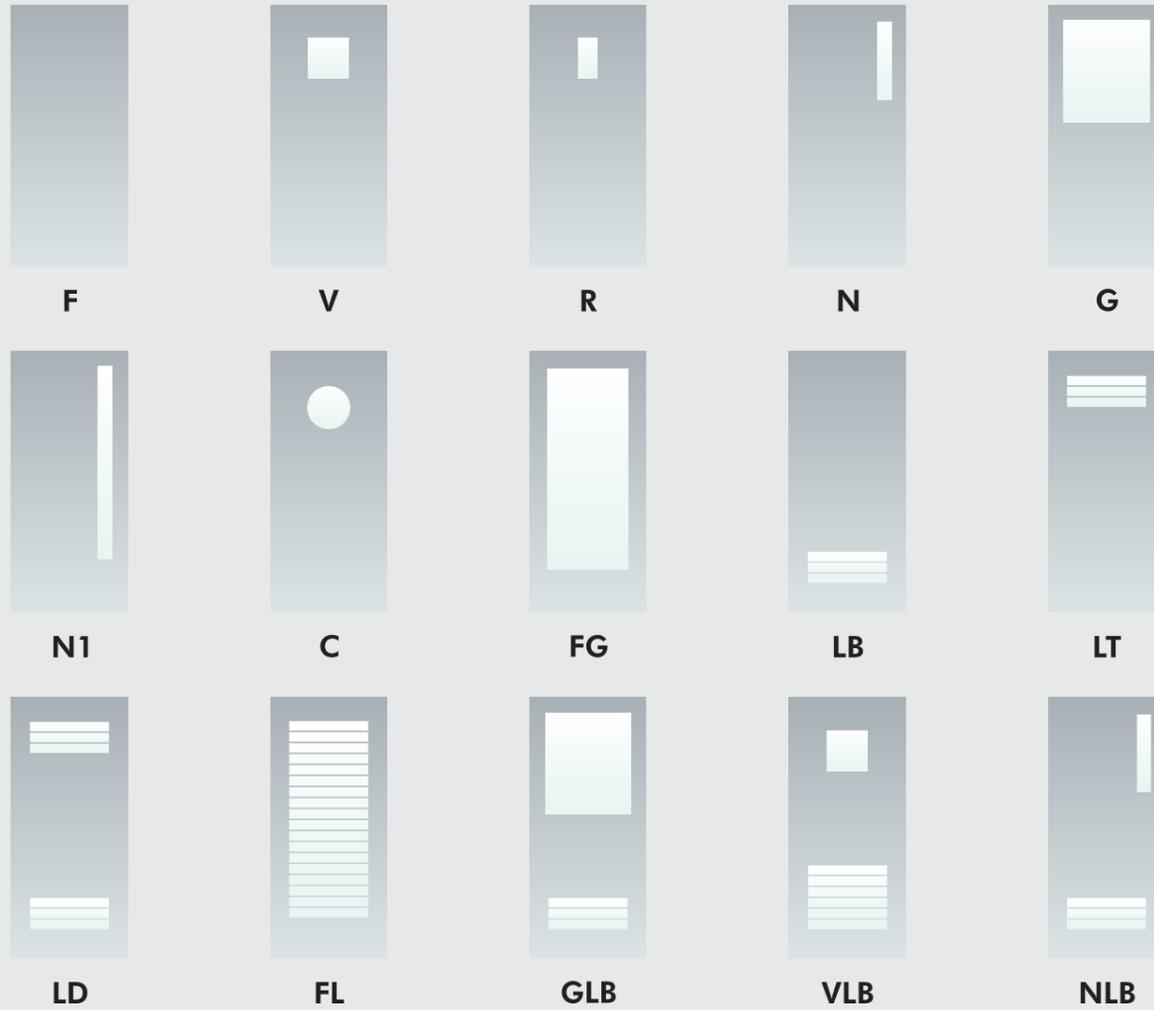

There is no limitation to the size of Vision Lite for General Application Doors  
 Max. Glass Width = Net Door Width - 300 mm  
 Max. Glass Height = Net Door Height - 400 mm

Alternatively, for larger transparency you can look into our product line - Rail & Door.

## RAL Colours



\*The colours and surface finishes shown are indicative and subject to change.

## Frames

### Variants

Mitre Joint  
 Butt Joint  
 Welded

### Options

Architrave on one side  
 Architrave on both sides

### Sheet Thickness (Profile Depth)

Up to to 150 mm - 1.2 mm  
 151 & above - 1.6 mm


### Frame Depth

Max : 350 mm  
 Min : 50 mm


### Smoke Seal

PVC Seal for Non-Fire Rated  
 EPDM Gasket for Fire Rated

### Single Rebate

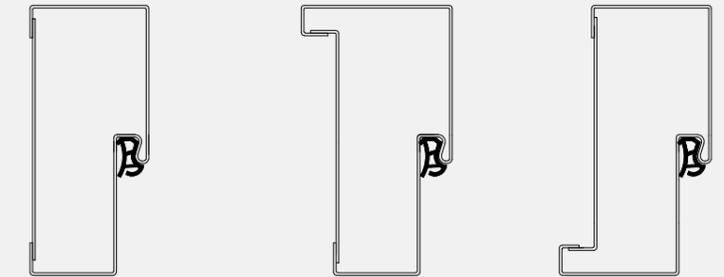

### Special Profiles

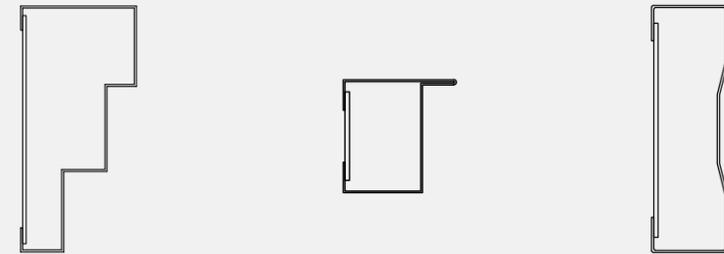


### Double Egress




### Zero Soffit

### Double Swing

### Frame Fixing Details

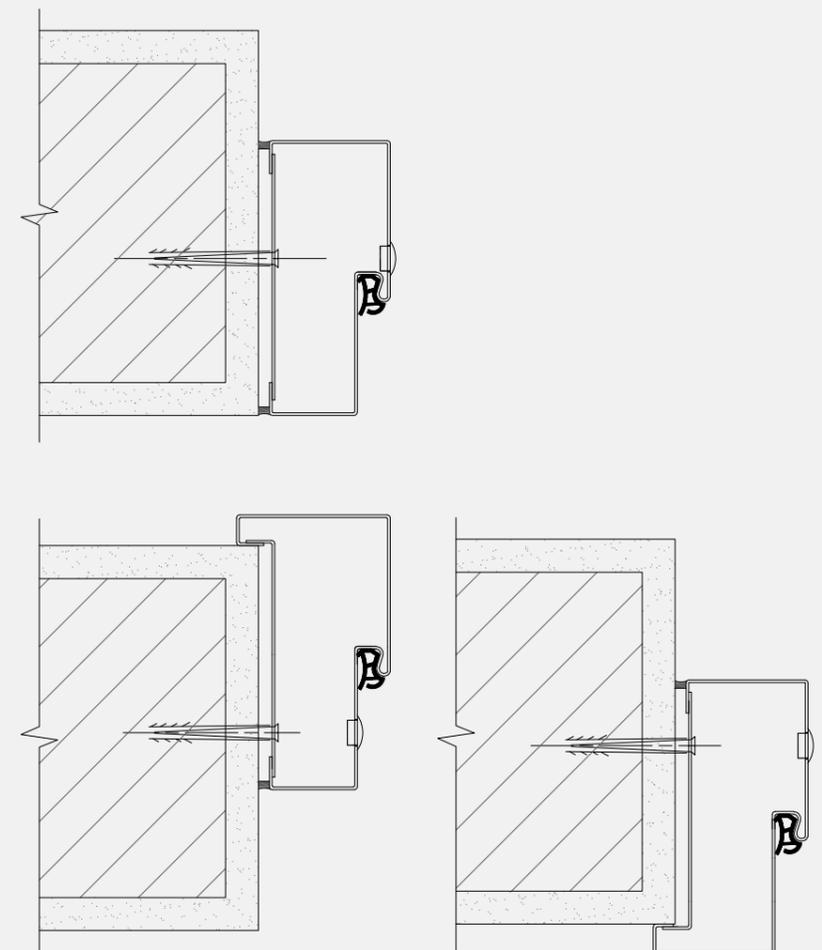



-  1 Sectional Door
-  2 Rolling Shutter & Rolling Grill
-  3 Loading Technology
-  4 Steel & Stainless Steel Sliding Door
-  5 Steel & Aluminium Multi-function Door
-  6 Stainless Steel Door
-  7 Steel Clean Room Door
-  8 Double Glazed Window
-  9 Emergency Exit Door
-  10 Fully Glazed Fire Door
-  11 GRAINTEK™ Door
-  12 Collective Garage Door
-  13 Automatic Swing Door
-  14 Automatic Glazed Sliding Door



Indian Green Building Council  
Greening India since 2001



### Eco-Conscious

At Hörmann, we believe in playing our role in contributing towards a sustainable tomorrow. We support energy conservation, green revelation and eco-friendly products. More than 60% of the power requirement at our production facility is fulfilled by our own solar power unit. Our factory and products are certified by Indian Green Building Council and are Platinum rated.

### Corporate Social Responsibility

Every time we achieve a little, we build a doorway to help others. The guiding principle is to improve the quality of the society and the environment that sustains us, and create a sustainable well-being.

As a socially responsible company, we have set aside 2% of our net profit every year to build a better community, help the unprivileged and contribute for the greater good of the planet.



# Our Presence in India





# Hörmann: Quality without Compromise



Hörmann KG Amshausen, Germany



Hörmann KG Antriebstechnik, Germany



Hörmann KG Brandis, Germany



Hörmann KG Brockhagen, Germany



Hörmann KG Dissen, Germany



Hörmann KG Eckelhausen, Germany



Hörmann KG Freisen, Germany



Hörmann KG Ichtershausen, Germany



Hörmann KG Werne, Germany



Hörmann Alkmaar B.V., Netherlands



Hörmann Legnica Sp. z o.o., Poland



Hörmann Beijing, China



Hörmann Tianjin, China



Hörmann LLC, Montgomery IL, USA



Hörmann Flexon LLC, Burgettstown PA, USA



Shakti Hormann, India



Hyderabad Plant, India



Jaipur Plant, India

RESIDENTIAL DOORS | COMMERCIAL DOORS | INDUSTRIAL DOORS | LOADING BAY TECHNOLOGY | PERIMETER CONTROL SYSTEMS



## Shakti Hormann Pvt.Ltd.

H.No.2-67/1, Gagillapur, Dundigal Municipality, Medchal(Malkajgiri) District - 500043. TS, India.

Email: sales@shaktihormann.com  
www.shaktihormann.com

+91 81422 36677



Platinum Rated Green Facility



An ISO 9001:2015, ISO 14001:2015 and ISO 45001:2018 certified company